

NS-102-G

Ball Bearing Lubricant

Low viscosity ball and roller bearing lubricant.

Characteristics:

- Low starting torque
- EP additives
- Anti-rust additives
- Moisture resistant

Typical properties

Color	Light Yellow
Thickener	Li soap
Dropping point, ASTM D2265, °C	190
Oil Separation, FTM 321.3, 24 hrs. @ 100°C, %	4.5
Penetration, ASTM D1403, worked, 60 Ds	285

Typical base fluid properties


Base fluid	Synthetic
Viscosity, ASTM D445 @ 40°C, cSt	47
Pour point, ASTM D97, °C	-55

Material Compatibilities:

Compatible with most engineering plastics including ABS and polycarbonate. Not for use with Buna S, Butyl, EPDM, EPR, or natural rubber elastomers. Check with material manufacturer or Syn-Tech concerning compatibility.

3/02 Rev.1

The information provided herein is offered without warranty, express or implied. Because Syn-Tech does not have control over products it gives as samples or sells, we can't guarantee the suitability of the product for your application. The information above is therefore only to be used as a recommendation.

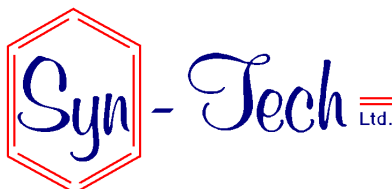

1433C W. Fullerton Ave.
Addison, IL 60101 USA

(630) 620-7050
www.syn-techlube.com