

Specifications

General Motors 9986140

Ford WSS-M1C260-A

NS-10895-G

Multi-Purpose Synthetic Grease

NS-10895-G is a synthetic grease designed for use in applications requiring a long life, low oxidation rate lubricant that reduces friction and wear as well as providing damping and noise control. Formulated with extreme pressure and anti-wear additives along with excellent rust and corrosion protection, this product can be used in applications requiring both low and high temperature performance. Applications might include light duty gearboxes, bearings, cables, plastic gears, slides, etc. Not recommended for non-ferrous or yellow metals.

Characteristics:

- PTFE fortified for smooth feel and reduced friction
- Excellent damping and noise control
- Low migration properties
- Excellent mechanical stability
- Operating temperature range -40°F(-40°C) to +300°F(+135°C)

Typical properties

Thickener	LI Soap
NLGI grade	2
Penetration, ASTM D1403, worked, 60 Ds	275
Penetration, ASTM D217, worked, 10,000 DS	345
Roll Stability, ASTM D1831	Change +18
Dropping point, ASTM D2265, °F(°C)	385(196.1)
Low Temp. Torque, ASTM D1478, start @ -40°C,g-cm	1534
Low Temp. Torque, ASTM D1478, 10 min @ -40°C,g-cm	1121
Low Temp. Torque, ASTM D1478, 1 hr. @ -40°C,g-cm	708
4-Ball Wear, ASTM D2266, average wear scar,mm	0.49
Oil Separation Storage, ASTM D1742, %	6.8
Water Washout, ASTM D1264, 100°F, %	1.25
Water Washout, ASTM D1264, 175°F, %	2.00
Oil Separation, ASTM D6184-98, 24 hrs. @ 212°F, %	2
Oil Separation, ASTM D6184-98, 24 hrs. @ 230°F, %	2.5
Specific gravity, 60/60°F, ASTM D1298	.858
Color	Green

Typical base fluid properties


Viscosity, ASTM D445 @ 40°C, cSt	75
Viscosity, ASTM D445 @ 100°C, cSt	12
Base fluid	PAO

Material Compatibilities:

Compatible with most engineering plastics including ABS and polycarbonate. Not for use with Buna S, Butyl, EPDM, EPR, or natural rubber elastomers. Check with material manufacturer or Syn-Tech concerning compatibility.

11/07 Rev.9

The information provided herein is offered without warranty, express or implied. Because Syn-Tech does not have control over products it gives as samples or sells, we can't guarantee the suitability of the product for your application. The information above is therefore only to be used as a recommendation. SOF 7.3-01-07 3/15/05

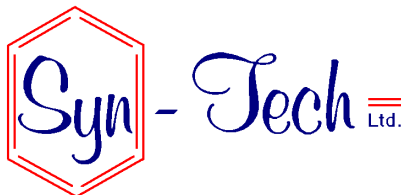

1550F W. Fullerton Ave.
Addison, IL 60101 USA

(630) 628-7290
www.syn-techlube.com

ISO 9001:2000 Registered