

NS-13889-G

Synthetic Contact Grease

A special purpose grease, designed for use in mechanical and electrical interface situations. This product has outstanding performance in applications requiring low arc-switching debris, durability, and lubricating qualities over a wide temperature range of -40°F to +285°F. Inhibited for Cu and Ag corrosion, and exhibits good mechanical stability. May be used on switches, lightly loaded gear-trains, potentiometers, etc.

Characteristics:

- Wide Operating temperature range -40°F to +285°F
- Cu and Ag corrosion protection
- Low residue in arc-switching
- Light tarnish and corrosion reduction capabilities
- Extremely soft consistency

Typical properties

Penetration, ASTM D1403, unworked	370 - 400
Penetration, ASTM D1403, worked, 60 Ds	395 - 425
Dropping point, ASTM D2265, °F, min.	350
Oil Separation, FTM 321.3, 24 hrs. @ 212°F, %	0.00 - 25.0
Evaporation Loss, ASTM D972, 22 hrs. @ 210°F, %	1.06
Specific gravity, 77/60°F	0.9807
Corrosiveness of Grease, FTM 5309.5, 24 hrs. @100°C	1a
Neutralization Number, ASTM D974	0.15
Neutralization Number, ASTM D974 8 hrs. @100°C	0.16
Shell 4-Ball Wear, ASTM D2266, mm	0.64
Bomb Oxidation, ASTM D942, 100 hrs @ 210°F, psi	9.85
Thickener	Organic

Typical base fluid properties

Base fluid	Synthetic
------------	-----------


Material Compatibilities:

While compatible with many plastics, this product is not recommended for use with ABS, polycarbonate, or PPO plastics. Check with Syn-Tech or manufacturer concerning compatibility information.

This product does not contain solids or silicone.

9/96 Rev.1

The information provided herein is offered without warranty, express or implied. Because Syn-Tech does not have control over products it gives as samples or sells, we can't guarantee the suitability of the product for your application. The information above is therefore only to be used as a recommendation. SOF 7.3-01-07 3/15/05

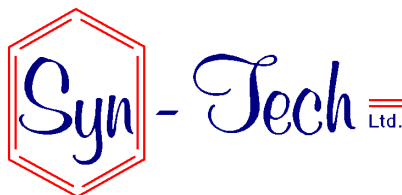

1550F W. Fullerton Ave.
Addison, IL 60101 USA

(630) 628-7290
www.syn-techlube.com

ISO 9001:2000 Registered