

# NS-1802-G

## Friction Reducing Mechanical Grease

---

NS-1802-G was designed to provide smooth feel to plastic-plastic and plastic-metal sliding interfaces while providing corrosion protection for nonferrous metals. The use of a high performance viscosity modifier combined with a low viscosity base fluid allows for excellent low temperature use with good high temperature damping ability. This product exhibits excellent mechanical stability and extremely low fluid migration, with low evaporation at high temperatures. Lower mechanical friction and improved anti-wear at higher temperatures are also exhibited. May be used in mechanical sections of switches, small gearboxes, wiper motors, cables and other similar devices.

### Characteristics:

- Temperature range of -40°F (-40°C) to +300°F (149°C)
- High mechanical stability
- Extremely low migration
- Exhibits 'smooth feel' and damping properties
- Nonferrous metals corrosion protection

### Typical properties

NLGI grade	0
Penetration, ASTM D1403, worked, 60 Ds	355
Oil Separation, ASTM D6184-98, 24 hrs. @ 212°F, %	0
Dropping point, ASTM D2265, °C	220
Copper corrosion, 24 hrs. @ 150°C	1b
Bomb Oxidation, ASTM D942, 100 hrs, 99°C, psi	1
4-Ball Wear, ASTM D2266, 40Kg, 1200 rpm, 75°C, mm.	0.70
Density, 20°C, g/cc	.85
Thickener	Li soap
Color	Cream

### Typical base fluid properties


Viscosity, ASTM D445 @ 40°C, cSt	31
Viscosity Index Extended, ASTM D2270	137
Pour point, ASTM D97, °C(°F)	-57 (-70)
Flash point, ASTM D92, °C (°F)	238(460)
Base fluid	Synthetic

### Material Compatibilities:

Compatible with most engineering plastics including ABS and polycarbonate. Not for use with Buna S, Butyl, EPDM, EPR, or natural rubber elastomers. Check with material manufacturer or Syn-Tech concerning compatibility.

3/10 Rev. 4

The information provided herein is offered without warranty, express or implied. Because Syn-Tech does not have control over products it gives as samples or sells, we can't guarantee the suitability of the product for your application. The information above is therefore only to be used as a recommendation. SOF 7.3-01-07 3/15/05

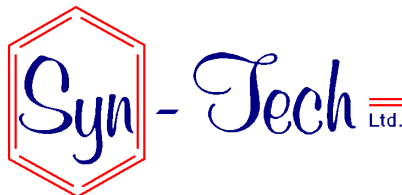

1550F W. Fullerton Ave.  
Addison, IL 60101 USA

(630) 628-7290  
[www.syn-techlube.com](http://www.syn-techlube.com)

**ISO 9001:2000 Registered**