

NS-2402-G

Electrical Contact Lubricant

A low evaporation rate electrical contact lubricant designed for long life at elevated temperatures. Low mechanical friction and improved anti-wear at higher temperatures is exhibited. This product is suitable for high current applications requiring low arc-switching debris with Cu, Cu alloy, Ni, Au and Ag corrosion protection over a temperature range of -40°C(-40°F) to 171°C(340°F). This product exhibits excellent mechanical stability with low fluid migration. May be used in switches, small gearboxes, cables and other similar devices.

Characteristics:

An operating temperature range of -40°F(-40°C) to +340°F(171°C)
Nonferrous metal corrosion protection
Good lubricity for reduced contact wear
Low evaporation rate for long life

Typical properties

Color	Amber
NLGI grade	2
Oil Separation, FTM 321.3, 24 hrs. @ 212°F, %	2

Typical base fluid properties


Viscosity, ASTM D445 @ 40°C, cSt	17
Viscosity, ASTM D445 @ 100°C, cSt	4
Flash point, ASTM D92, °C	240
Base fluid	Synthetic

Material Compatibilities:

Not for use with ABS, polycarbonate, polyester, PPO, or PVC plastics. Not for use on buna S, butyl, or neoprene elastomers. Check with material manufacturer or Syn-Tech concerning compatibility.

04/02 Rev.0

The information provided herein is offered without warranty, express or implied. Because Syn-Tech does not have control over products it gives as samples or sells, we can't guarantee the suitability of the product for your application. The information above is therefore only to be used as a recommendation.

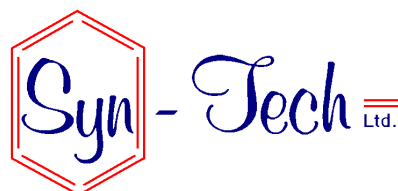

1433C W. Fullerton Ave.
Addison, IL 60101 USA

(630) 620-7050
www.syn-techlube.com