

NS-2517-SBO

ISO 100 Bearing Oil with Solid Polymer Matrix

NS-2517-SBO is a unique combination of an ISO 100 synthetic hydrocarbon oil in a solid porous polymer carrier formulated to lubricate ball, tapered roller, needle roller, spherical roller and cylindrical roller bearings. The porous polymer carrier slowly releases oil to the bearing components. The carrier also forms a wall, blocking particulate contamination without the need for expensive seals.

Usage instructions: Mix NS-2517-SBO to disperse polymer particles that may have settled. The solid polymer gell matrix is formed after heating the bearing with NS-2517-SBO to 145°C or greater for at least 30 minutes. Allow the bearing to cool to room temperature before operating.

Other oil viscosities are available

Characteristics:

- Solid porous polymer gell matrix
- Prevents bearing contamination
- Protects against rust and corrosion
- Lubricated for life applications
- Operating temperature range of -40°C to +110°C

Typical Properties

Color	Red
Density, 20°C, g/cc	0.865

Typical Base Fluid Properties


Base fluid	PAO
ISO Viscosity Grade	100
Viscosity, ASTM D445 @ 40°C, cSt	105
Viscosity Index Extended, ASTM D2270	151

Material Compatibilities:

Compatible with most engineering plastics including ABS and polycarbonate. Not for use with Buna S, Butyl, EPDM, EPR, or natural rubber elastomers. Check with material manufacturer or Syn-Tech concerning compatibility.

06/17 Rev.0

The information provided herein is offered without warranty, express or implied. Because Syn-Tech does not have control over products it gives as samples or sells, we can't guarantee the suitability of the product for your application. The information above is therefore only to be used as a recommendation. It should not be used as the basis of a specification. SOF 7.3-01-07 4/28/17

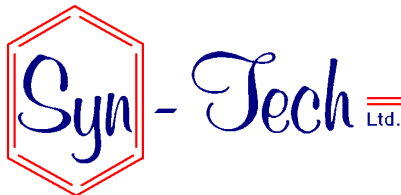

1550F W. Fullerton Ave.
Addison, IL 60101 USA
(630) 628-7290
www.syn-techlube.com

Lubricants that Solve Problems