

# NS-2609-G

## Moisture Resistant Antiwear Grease

---

NS-2609-G is a synthetic hybrid grease with a solid additive package formulated to prevent wear and resist water washout. Gelled with a lithium complex soap thickener for high shear stability. Protects steel from rust and yellow metals from corrosion.

Characteristics:

- Good wear resistance for metals and plastics
- Water washout resistant
- Rust and corrosion protection
- Wear preventing solid additive package
- Operating temperature range of -20°C to 163°C (-4°F to 325°F)

Typical Properties

- |  |                 |
|--|-----------------|
| Color                                  | Light Yellow    |
| NLGI grade                             | 2-3             |
| Penetration, ASTM D1403, worked, 60 Ds | 253             |
| Thickener                              | Lithium Complex |

Typical Base Fluid Properties


- |            |                  |
|------------|------------------|
| Base fluid | Synthetic Hybrid |
|------------|------------------|

Material Compatibilities:

Compatible with most engineering plastics (including ABS and polycarbonate) and elastomers. Check with material manufacturer or Syn-Tech concerning compatibility.

9/13 Rev.1

The information provided herein is offered without warranty, express or implied. Because Syn-Tech does not have control over products it gives as samples or sells, we can't guarantee the suitability of the product for your application. The information above is therefore only to be used as a recommendation. It should not be used as the basis of a specification. SOF 7.3-01-07 4/28/17

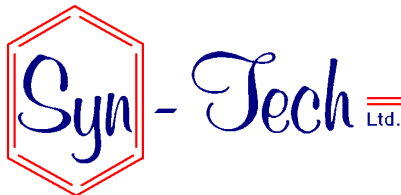

1550F W. Fullerton Ave.  
Addison, IL 60101 USA

(630) 628-7290  
[www.syn-techlube.com](http://www.syn-techlube.com)

**Lubricants that Solve Problems**